

HOOZONE | CIRCULAR POD

Creating a softer aesthetic with the curved walls, the circular pod is the preferred choice for meeting pods central to the office space, still encouraging the natural flow of the space. Offered in a standard footprint of 3000mm diameter for the circular pod, but still maintaining the flexibility with the height and available to create loop or half loop pods.

Specification


- Upholstered panels are 55mm thick with sound absorbing foam internal.
- Glazed panels are 55mm thick with 8mm clear single glazed toughened glass.
- Ceiling panels are 52mm thick upholstered on both sides with light grey fabric.
- Integrated aluminium facilities arch included as standard housing lighting system.
- Sliding doors are 8mm clear single glazed toughened glass.
- Pods are acoustically tested to BSEN ISO 140 and have a rating of 36dB.
- Lighting system is PIR operated, high output – low voltage, diffused, dual LED strips.
- All glazed panels and doors are supplied with double row of 50mm diameter opal frosted spots.
- Usable door opening is 805mm which is DDA compliant.
- Internal pod height from floor to ceiling panel is 2159mm.
- Sliding doors supplied with double sided door handle, rubber door stops, door guide and brush piles.
- Integrated air circulation fans available with 216m³ per hour of airflow.
- For power/AV sockets, manifestations and accessories.
- Upholstered and glazed panels can be mixed on each quadrant.
- Various framework colour finishes available.
- Pods can be manufactured to any millimetre height, width or depth allowing full adaptability.

Front 3 Panels Glazed

	size	footprint (m ²)	height
	3000mm diameter	7	2200mm

Front 1 Panel Glazed

	size	footprint (m ²)	height
	3000mm diameter	7	2200mm

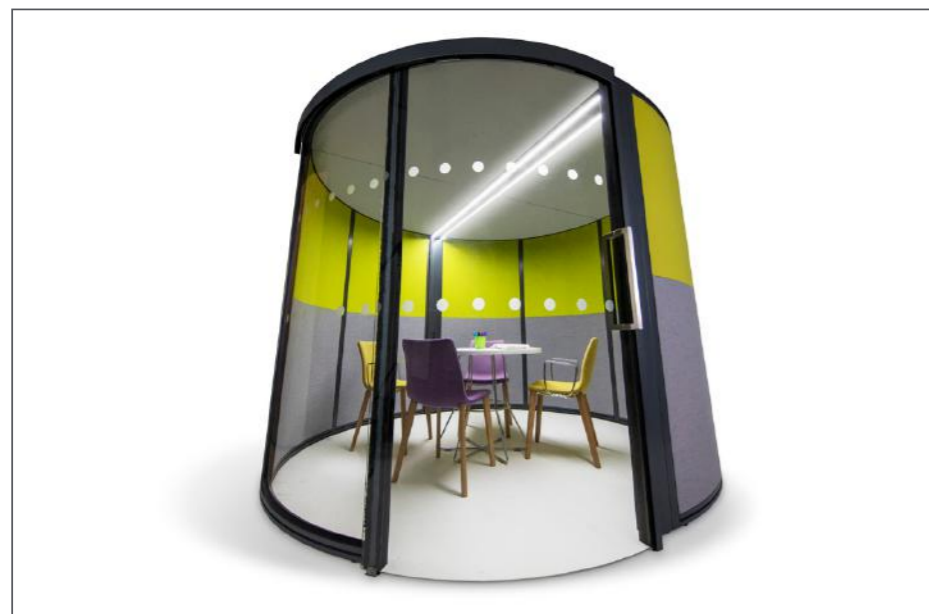

Manufactured with 47% recycled content and 72% recyclable content.



To reduce our environmental impact 92% of manufacturing waste is recycled.



Available in sustainable fabrics which are recycled, renewable, compostable, and climate neutral.




All timber components sourced through sustainably managed forests.



Pods are acoustically tested to BSEN ISO 140 and have a rating of 36dB.



Supplied with a 5 year warranty subject to normal wear and tear (electrics 1 year).














Tested to BSEN1023 parts 1/2/3 and certified by FIRA.



Manufactured in the UK. Materials bought locally and sourced responsibly.

HOOZONE - Accessories

	description	code
	Soft close for sliding door	H/Z001
	Door lock for sliding door (Europrofile Cylinder) - thumbturn	H/Z002
	Remote control dimmable lighting	H/Z012
	Air circulation fan	H/Z004
	Air circulation fan with carbon filter	H/Z005
	Opal frosted manifestation - double row of 50mm diameter spots (per panel)	H/Z006
	Opal frosted manifestation - 400mm high stripe (per panel)	H/Z007
	Opal frosted manifestation - 800mm high stripe (per panel)	H/Z008
	Opal frosted manifestation - 1200mm high stripe (per panel)	H/Z009
	Opal frosted manifestation - full height (per panel)	H/Z010
	Bespoke manifestation - in many colours and designs	H/Z011

	description	code
	Flush mounted socket for existing arch power post - 1 UK power	H/Z013
	Flush mounted socket for existing arch power post - 2 UK power	H/Z014
	Flush mounted socket for existing arch power post - 1 UK power, 1 twin USB fast charge (A+C)	H/Z015
	Flush mounted socket for existing arch power post - 1 UK power, 2 data (CAT6)	H/Z016
	Flush mounted socket for existing arch power post - 1 UK power, 1 HDMI	H/Z017
	Flush mounted socket for existing arch power post - 3 UK power	H/Z018
	Flush mounted socket for existing arch power post - 2 UK power, 1 twin USB fast charge (A+C)	H/Z019
	Flush mounted socket for existing arch power post - 2 UK power, 2 data (CAT6)	H/Z020
	Flush mounted socket for existing arch power post - 2 UK power, 1 HDMI	H/Z021
	Dry wipe whiteboard with silver frame 1000mm high	H/Z032
	Dry wipe magnetic white 4mm glass panel - 1000mm high x 1000mm wide	H/Z033

	description	code
	Flush mounted socket for existing arch power post - 1 UK power, 1 twin USB fast charge (A+C), 2 data (CAT6)	H/Z022
	Flush mounted socket for existing arch power post - 1 UK power, 1 twin USB fast charge (A+C), 1 HDMI	H/Z023
	Flush mounted socket for existing arch power post - 1 UK power, 2 data (CAT6), 1 HDMI	H/Z024
	Flush mounted socket for existing arch power post - 4 UK power	H/Z025
	Flush mounted socket for existing arch power post - 3 UK power, 1 twin USB fast charge (A+C)	H/Z026
	Flush mounted socket for existing arch power post - 3 UK power, 2 data (CAT6)	H/Z027
	Flush mounted socket for existing arch power post - 3 UK power, 1 HDMI	H/Z028
	Flush mounted socket for existing arch power post - 2 UK power, 1 twin USB fast charge (A+C), 2 data (CAT6)	H/Z029
	Flush mounted socket for existing arch power post - 2 UK power, 1 twin USB fast charge (A+C), 1 HDMI	H/Z030
	Flush mounted socket for existing arch power post - 2 UK power, 2 data (CAT6), 1 HDMI	H/Z031
	TV/monitor bracket suits up to 39" (small) for existing arch post (max weight 16kg) - includes 1 UK power	H/Z034

	description	code
	TV/monitor bracket (tilt) suits 32-50" (medium) for existing arch post (max weight 22kg) - includes 1 UK power	H/Z035
	TV/monitor bracket suits 47-90" (large) for existing arch post (max weight 59kg) - includes 1 UK power	H/Z036
	Sound absorbing carpet and underlay with installation (for pod footprint up to 2200mm x 1500mm)	H/Z037
	Sound absorbing carpet and underlay with installation (for pod footprint up to 3000mm x 3000mm)	H/Z038
	Sound absorbing carpet and underlay with installation (for pod footprint up to 3000mm x 4000mm)	H/Z039